

let's make
payment
happen



CCV IM30

The game-changer in
cashless payments

- **A future-proof solution**
The Android-based platform supports endless possibilities
- **Always-on data insights**
Use online tools to limit machine downtime and increase operability
- **Best-in-class security**
Features high-end security which surpasses industry standards





Technical Data

Display	5 inches TFT color touchscreen, 720 x 1280 pixels, IPS, Brightness > 600 nits, Anti-glare surface, great readability under sunlight, Scratch resistance 7H display Mohs hardness
Power supply	7 – 48 V DC via main power connector, 12V – 48 VDC via MDB slave, 12V – 48V DC via RS232
Power consumption	With modem: Full operation: <650 mA peak (without active 4G modem) Power Save Mode: typ. 6 mA (without active 4G modem), Without modem: Full operation: < 500 mA peak. Power Save Mode: typ. 5 mA (* all power consumption values based on 12 V DC supply)
Dimensions	W x H x D (mm): 105 x 146 x 31,5 (front), W x H x D (mm): 82,2 x 107,2 x 25,2 (within machine)
Front plane cutout	W x H (mm): 82,2 x 107,2 (industry standard), W x H (mm): 86,4 x 108,7 (EVA EPS 2.1 compliant)
Communication/ interfaces	2 x RS232, 2 x SAM, USB, LAN, WLAN, RF Modem (optional), MDB, bluetooth, QR-scanner, camera, CCV OAM, audio and video via AUX and HDMI
Digital I/Os	1 x Output, switched GND, max. 350 mA driver capability, 3 x Input, switched GND, max. 0,5 mA, < 0,5 V DC @ LOW state, 1 x potential free Output, 1 x potential free Input, 2 x S/W controllable power outputs
Ambient conditions	Operating temperature: -20°C ... +70°C (-22°F ... +158°F) 5% - 95% relative air humidity non-condensing
Flammability rating	V2 according to UL94, IEC 60695 – 11 – 10, - 20
Certifications & compliances	IP55 & IK08, PCI PTS 5.x, EMVCo Contact L1&L2, EMVCo Contactless L1&L2, Mastercard and Visa, CE, UL, FCC, RoHS CE, RoHS

Let's make payment happen!

CCV is a family-owned business with a heart for entrepreneurship and innovation. We support over 600,000 clients in over 15 countries with reliable and future-proof payment solutions. With more than 60 years of experience in the payment industry, our success is based on our long-term commitment to our customers: however small or large.



Want to know more?

+31 88 288 9849

or send us an email: supportme@ccv.eu




www.ccv.eu

Datenblatt

Edelstahl Standfuss für CCV IM30 Terminal

Baujahr: 2024

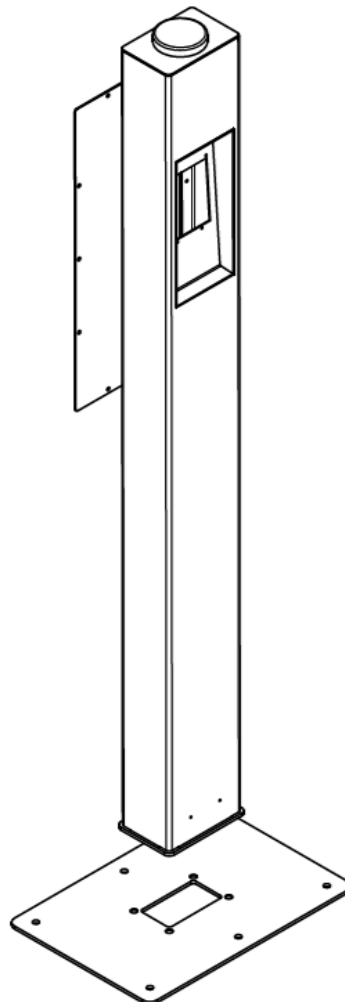

Technische Daten

Artikelnummer	04260732393115
Artikelbezeichnung	Edelstahl Standfuss für CCV IM30 Terminal
Bauart	Edelstahl Stele
Maße Standfuss (H x B x T)	1397mm x 150 x 110mm
Maße Bodenplatte (L x B)	425mm x 295mm
Bodenplatte Bohrungen	4x 10,5mm (M10)
Rohrstärke Stele	3mm
Gewicht netto	20 Kg
Gewicht brutto	21 Kg
Material Stele	V2A Edelstahl
Oberfläche Stele	Pulverbeschichtet, DB 703 Eisenglimmer
Lieferumfang	- 1x Standfuss + Revisionsklappe - 1x Bodenplatte - 1x Anschlusskasten - 1x Netzteil 230/12V - Montage-Set bestehend aus: 8x M5x12 Sicherheitsschrauben Torx+Pin 4x Senkkopfschraube M10x20

Technisches Produktdatenblatt

Montage	
Installation 	Die Installation des Standfußes darf ausschließlich von einer qualifizierten Elektro-Fachkraft durchgeführt werden. Bei der Installation sind die aktuell geltenden Standards und Normen zwingend einzuhalten. Besondere Aufmerksamkeit ist auf die richtige Absicherung zu legen!
Aufbau	Schritt 1: Stele und Bodenplatte aus Kartonage entnehmen. Schritt 2: Bodenplatte mittels 4x M10x20 Schrauben mit Stele verschrauben. Schritt 3: Revisionsklappe öffnen und Zuleitung von unten durch die Stele zur Anschlussbox führen. Schritt 4: Anklemmen der Zuleitung und Revisionsklappe wieder verschrauben. Schritt 5: Montage der Grundplatte auf geeignetem Fundament / Untergrund. Wir empfehlen bei Betonfundament für einen sicheren Halt: Schwerlastanker M10x 80mm

Arbeitsbedingungen	
Umgebungstemperatur Lagerung	-30 bis 85 °C
Umgebungstemperatur Betrieb	-30 bis 40 °C
Maximale Innentemperatur	-30 bis 55 °C
Maximale	Aufbauhöhe ≤ 2.000 m über NN

Technisches Produktdatenblatt

Abmessungen [mm]

